Modular access control system for rack enclosures





TANlock by Eaton is the ideal modular access control system (MACS) for IT enclosures, providing the extra security required. Eaton has partnered with best-in-class lock manufacturer Fath Mechatronics, to provide you with the most versatile MACS in the market, providing seven different authentication technologies to meet your needs. With two smart lock models available, TANlock by Eaton gives you the options required to effectively secure your rack enclosures.

Key features and benefits:

Save time

 Get up and running quickly with active directory, LDAP and RESTful API support

Save money

- Use your existing rack by retrofitting to any enclosure with standard universal door cutouts
- Modular design allows you to update access requirements as requirements change without replacing the lock

Reduce risk

- Keep unwanted guests out of your enclosure with two-factor authentication options
- Monitor and manage access credential logins to provide access to specific individuals

Select your model:

Select either the TANlock Zero for basic, localized security deployments or upgrade to the TANlock 3 PoE connectivity and Eaton software integration for remote management and monitoring.

TANlock Zero (5V/12V/24V)



- Powered by geared motors
- Master emergency Key
- · Connection to SPS

TANlock 3 (PoE: Power of Ethernet)



- HTTPS
- Syslog
- MS Active Directory, LDAP, RESTful API
- Web API
- · Two-factor authentication
- SNMP

Select your TAM:

With multiple TANlock Authentication Modules (TAM) options for TANlock Zero and TANlock 3, Eaton provides provides you with a variety of security options. If requirements change, you can change out TAMs without replacing the entire lock. These options provide you with the ability to customize your physical security needs which may differ across industries including the financial and health care sectors.



PIN pad

- PIN input
- Combine with RFID for two-factor authentication



Hand vein scanner

 Highest security level through hand vein detection



RFID (radiofrequency identification)

- 125 KHz frequency band
- 13,56 MHz frequency band
- HID, Mifare, Desfire



Finger print scan

 Biometric procedure protects from abuse



Touch display

- Authentication through entry at the touch display
- Displays operation parameters like temperature and humidity




Remote

- Access over remote control
- Versatile access possibilities
- 5V, 12V, 24V

TANlock by Eaton model selection guide

| Catalog number | Description | | |
|----------------|--|--|--|
| TL3-POE-KPAD | TANLock 3, black powder coated, with Keypad | | |
| TL3-POE-RFID | TANLock 3, black powder coated, with RFID Reader | | |
| TL3-POE-FNGR | TANLock 3, black powder coated, with Fingerprint reader | | |
| TL3-POE-PALM | TANLock 3, black powder coated, with Vein scanner (Palmreader) | | |
| TL3-POE-TCH | TANLock 3, black powder coated, with Touch display | | |
| TL3-POE-DUAL | TANLock 3, black powder coated, with Dual authentication PIN/RFID | | |
| TL3-POE-CODE | TANLock 3, black powder coated, for Bar Code / QR Code | | |
| TLZ-REMOTE | TANLock Zero, black powder coated, with remote opening | | |
| TLZ-KPAD | TANLock Zero, black powder coated, with Keypad | | |
| TLZ-TCH | TANLock Zero, black powder coated, with Touch Display | | |
| TLZ-RFID | TANLock Zero, black powder coated, with RFID 13.56 Mhz | | |
| TLZ-FNGR | TANLock Zero, black powder coated, with Fingerprint | | |
| TLZ-DUAL | TANLock Zero, black powder coated, with Dual authentication PIN/RFID | | |

Select your enclosure: Both TANlock Zero and TANlock 3 options integrate directly into Eaton enclosures, as well as any other enclosure with a universal cutout door dimension.

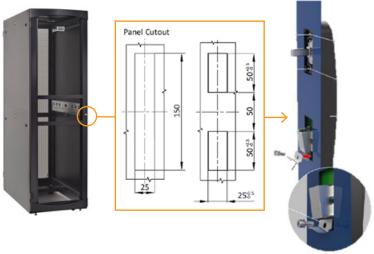

TANlock options come with all required hardware for mounting to an Eaton enclosure or other universal cutout enclosure doors. For required dimensions and installation instructions, consult the user guide found at Eaton.com/TANlock.

Select your management options:

TANlock offers multiple communication options when it comes to connecting it into your IT/facilities infrastructure for management purposes.

Ready for deployment into Eaton VPM/VCOM software offerings:

Bolster the security of your IT enclosures via simplified remote management, status logging and access controls down to the individual rack level. A part of the Eaton Intelligence Platform, Visual Power Manager (VPM) and Visual Capacity Optimization Manager (VCOM) are your Eaton software solutions for TANlock.



VPM provides IT managers of data centers and distributed IT environments the tools to remotely monitor their power devices, including all UPSs and PDUs. An HTML5-based platform, VPM is easy-to-deploy, simplifies day-to-day monitoring and helps maintain business continuity. VPM offers two levels of licenses. VPM Essential is a self installable, subscription-based license that offers essential power management capabilities in a simplified interface for a competitive price; VPM Professional offers the ability to visualize infrastructures with asset management and location-based analytics to take necessary actions for continuous uptime of critical applications.

Eaton.com/VPM



VCOM, Eaton's data center system optimization (DCSO) platform, is an intuitive remote monitoring and management software that provides you with valuable information to make better business decisions. The HTML5- based platform features capabilities designed to reduce data center operational expenses, improve system and application reliability and mitigate risk through data analysis. You gain the unique ability to not only easily track usage, utilization, capacity limits and more, but also the advantage of reacting quicker to address any related concerns. The value of VCOM is not limited to one type of data center business. Rather, VCOM creates huge opportunities for users from small businesses to commercial enterprises.

Eaton.com/VCOM

VPM/VCOM comparison chart

| Footures | VPM | | •••• VCOM |
|--|-------------|---------------|---------------|
| Features | Essential | Professional | |
| Maximum monitored devices supported ¹ | Up to 1,000 | Up to 500,000 | Up to 500,000 |
| Fully HTML5 web interface | ✓ | ✓ | ✓ |
| Auto discovery | ✓ | ✓ | ✓ |
| Mass firmware upgrade tool | ✓ | ✓ | ✓ |
| Mass node-settings configuration tool | ✓ | ✓ | ✓ |
| Send email notifications | ✓ | ✓ | ✓ |
| Monitor third-party devices | ✓ | ✓ | ✓ |
| List based asset catalog | ✓ | ✓ | ✓ |
| Self installable virtual appliance | ✓ | | |
| Event-based automation | ✓ | ✓ | ✓ |
| Integrated reporting engine | ✓ | ✓ | ✓ |
| Microsoft Active Directory integration | ✓ | ✓ | ✓ |
| Supports LDAP authentication | ✓ | ✓ | ✓ |
| Dashboard with trend analysis | ✓ | ✓ | ✓ |
| Multi-tenant user access control | ✓ | ✓ | ✓ |
| Location based navigation | | √ | ✓ |
| Visual, map-based alarm status | | √ | ✓ |
| 3D rack elevation builder | | ✓ | ✓ |
| Rack group aggregated data analytics | | ✓ | ✓ |
| Intelligent single click, remote device power cycling | | ✓ | ✓ |
| Power aggregation through the power chain | | ✓ | ✓ |
| ITSM integration (ServiceNow, Remedy, etc.) | | ✓ | ✓ |
| Full end-to-end facilities monitoring (utility entrance to IT application) | | | ✓ |
| Workflow management (project, task, work order) | | | ✓ |
| Security Studio – cameras, locks, etc. | | | ✓ |
| 3D visualization – facilities equipment, IT rack and hardware, office space, chilled water, cable tray | | | ✓ |
| Project planner (IT and facilities deployment tracking) | | | ✓ |
| Capacity planner / "what if" scenarios (by project or ad hoc scenarios) | | | ✓ |
| Impact/root cause analysis | | | ✓ |
| Asset warranty/service deployment tracking maintenance log | | | ✓ |
| Advanced port mapping (power + network and fiber) | | | ✓ |
| Site level dashboards and business intelligence | | | ✓ |

¹ Based on standard architecture, more can be achieved with evaluation by Eaton.

To learn more, visit: **Eaton.com/TANlock**

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

© 2020 Eaton All Rights Reserved Publication No. BR152055EN / GG Line 2020

